

MDG120PH

MAYTAG® COMMERCIAL
ON-PREMISES DRYING TUMBLER



LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperatures and cool-down. Then select the cycle with the simple touch of a button.

KEEP YOUR OPERATION SAFE

The Sensor-Activated Fire Extinguisher (S.A.F.E.) automatically senses dryer fires, douses them with water and shuts off when the fire is out to minimize water damage. It's a breakthrough in commercial laundry safety that can even reduce your insurance costs!

FOR YOUR OPERATION:

- 120-Pound Capacity Dries More At Once
- Auto Cycle Prevents Overdrying
- Programmable Anti-Wrinkle Feature
- Display Counts Down Time Remaining In Cycle
- Extra-Large Door Opening
- Extra-Large Lint Compartment
- Easy-Access Design For Convenient Self-Service
- Optional Reverse Tumbler Feature Reduces Twisting
- Removable Top Section For Easier Installation

BUILT-TO-LAST™ FEATURES:

- S.A.F.E. System Puts Out Dryer Fires
- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor

LAUNDRY SOLUTIONS
YOU CAN *DEPEND* ON.

S.A.F.E. SYSTEM PROTECTS
AGAINST DRYER FIRES

visit maytagcommerciallaundry.com
or call 800-662-3587



OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.




MDG120PH

MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLER

Maytag® Commercial On-Premises Drying Tumbler MICROPROCESSOR CONTROL

DRYER SPECIFICATIONS	
MODEL	MDG120PH
CAPACITY	
Capacity — lbs. (kg) dry weight	120 (54)
Capacity — cu. ft. (cu. m)	38.2 (1.08)
Tumbler diameter — in. (mm)	44.5 (1130)
Tumbler depth — in. (mm)	42.5 (1079)
REVERSING TUMBLER (optional)	Yes
DRIVE MOTOR	
HP (kw) (blower)	3 (2.24)
Tumble speed — rpm	38
AIRFLOW	
Cfm (cmm) per pocket	2150 (60.9)
GAS RATING	
BTU/hr. (kcal/hr.)	375,000 (94,500)
Gas Inlet — F.N.P.T. in. (mm)	1.25 (31.8)
ELECTRICAL REQUIREMENTS	
Volts (Hz)/phase	
Domestic models	208-240 (60)/3PH
Export models — options available	208-240V/50-60Hz/1PH or 3PH
BREAKER/FUSE REQUIREMENTS — AMPS	
Each drying chamber	20
COLOR	
White	Yes
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	1,489 (675)
Uncrated — lbs. (kg)	1,349 (612)
DIMENSIONS	
A) Height — in. (mm)	86.88 (2207)
B) Width — in. (mm)	48.75 (1238)
C) Depth including door handle — in. (mm)	62.5 (1588)
D) Floor to center of exhaust — in. (mm)	9.5 (241)
E) Exhaust duct diameter — in. (mm)	14 (356)
Door opening diameter — in. (mm)	31.38 (797)
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.	

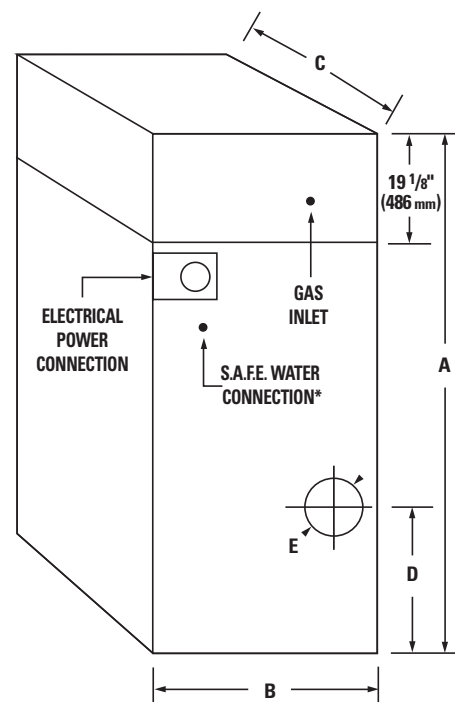

*S.A.F.E. water pressure requires 40 psi ± 20 psi. Requires 1/2" (12.7 mm) water hose connection.



NEW YORK CITY
M.E.A.



MAYTAG® LIMITED WARRANTY 3 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

For more information and pricing, contact:

Equipment Marketers

100 Melrose Avenue
Cherry Hill, NJ 08003

Phone: 800.223.1376

Fax: 856.428.5477

www.equipmentmarketers.net

maytag@equipmentmarketers.net