

# MDG30/50/75MNV

MAYTAG® COMMERCIAL  
ON-PREMISES DRYING TUMBLERS



## LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



## MECHANICAL CONTROLS

Dual timer controls let you set drying and cool-down time separately, while the push-button rocker switch makes it easy to choose the correct temperature.

## GET LAUNDRY DONE FASTER

The big-load capacity of Maytag® on-premises drying tumblers helps you save time and energy costs by drying more laundry at once. Plus, the extra-large door opening makes loading and unloading easy.

## FOR YOUR OPERATION:

- Simple Push-To-Start Switch For Safety
- In-Use Indicator Light
- Dual Timers Show Drying And Cool-Down Times
- Extra-Large Door Opening
- Extra-Large Lint Compartment
- Easy-Access Design For Convenient Self-Service
- Available in 30-, 50-, And 75-Pound Capacities

## BUILT-TO-LAST™ FEATURES:

- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor



Model MDG30/50MNV

Model MDG75MN

LAUNDRY SOLUTIONS  
YOU CAN *DEPEND ON.*

DUAL CONTROLS ARE  
EASY FOR ANYONE  
TO OPERATE

visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com)  
or call 800-662-3587



## OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.



## MDG30/50/75MNV MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLERS


### Maytag® Commercial On-Premises Drying Tumblers MICROPROCESSOR CONTROL

Available in 30, 50 and 75 Pound Capacities

| DRYER SPECIFICATIONS                        |                  |                  |                  |
|---|------------------|------------------|------------------|
| MODELS                                      | MDG30MNV         | MDG50MNV         | MDG75MNV         |
| <b>CAPACITY</b>                             |                  |                  |                  |
| Lbs. (kg) dry weight                        | 30 (13.6)        | 50 (22.7)        | 75 (34)          |
| Cu. ft. (cu. m)                             | 12.5 (.354)      | 18.3 (.518)      | 22.4 (.634)      |
| <b>TUMBLER</b>                              |                  |                  |                  |
| Diameter—in. (mm)                           | 32.75 (832)      | 32.75 (832)      | 37 (940)         |
| Depth—in. (mm)                              | 25.63 (651)      | 37.5 (953)       | 36 (914.40)      |
| <b>MOTOR</b>                                |                  |                  |                  |
| HP (kw) drive motor                         | 1/2 (.373)       | 3/4 (.560)       | 1 (.746)         |
| Tumble speed—rpm                            | 43 ± 2           | 43 ± 2           | 40 ± 2           |
| <b>AIRFLOW</b>                              |                  |                  |                  |
| Cfm (cmm)                                   | 460 (13)         | 750 (21.2)       | 1,000 (28.3)     |
| <b>HEAT INPUT</b>                           |                  |                  |                  |
| BTU/hr. (kcal/hr.)                          | 100,000 (25,200) | 150,000 (37,800) | 175,000 (44,100) |
| <b>GAS INLET</b>                            |                  |                  |                  |
| In. (mm) size—amps                          | 1/2 (13)         | 1/2 (13)         | 3/4 (19)         |
| <b>BREAKER/FUSE REQUIREMENTS—amps</b>       |                  |                  |                  |
| Domestic model                              | 15               | 20               | 20               |
| <b>COLOR</b>                                |                  |                  |                  |
| White                                       | •                | •                | •                |
| <b>APPROXIMATE WEIGHT</b>                   |                  |                  |                  |
| Crated—lbs. (kg)                            | 571 (259)        | 700 (317.5)      | 771 (349.7)      |
| Uncrated—lbs. (kg)                          | 534 (242.2)      | 651 (295.3)      | 721 (327)        |
| <b>DIMENSIONS</b>                           |                  |                  |                  |
| A) Height—in. (mm)                          | 72 (1829)        | 72 (1829)        | 75.13 (1908)     |
| B) Width—in. (mm)                           | 34.25 (870)      | 34.25 (870)      | 38.25 (971.5)    |
| C) Depth not including door handle—in. (mm) | 36.88 (937)      | 48.50 (1232)     | 47 (1194)        |
| D) Floor to center of exhaust—in. (mm)      | 10.5 (267)       | 10.5 (267)       | 18.25 (464)      |
| E) Exhaust duct diameter—in. (mm)           | 8 (203)*         | 8 (203)*         | 8 (203)*         |
| Door opening diameter—in. (mm)              | 21.5 (546)       | 21.5 (546)       | 31.38 (797)      |

\* Requires 8" (203 mm) material if venting horizontally; 10" (254 mm) if venting vertically. An 8"-10" (203-254 mm) transition must be used.

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

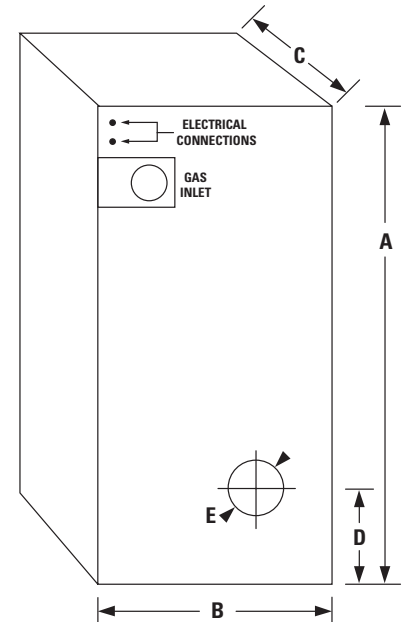

NEW YORK CITY  
M.E.A.



### MAYTAG® LIMITED WARRANTY 3 YEARS—ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

For more information and pricing, contact:

## Equipment Marketers

100 Melrose Avenue  
Cherry Hill, NJ 08003

[www.equipmentmarketers.net](http://www.equipmentmarketers.net)

Phone: 800.223.1376

Fax: 856.428.5477

[maytag@equipmentmarketers.net](mailto:maytag@equipmentmarketers.net)