

MDG50PCCWW

MAYTAG® COMMERCIAL
MULTI-LOAD DRYER



LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



THE CAPACITY YOUR CUSTOMERS DEMAND

Maytag® multi-load dryers are the perfect match for large-capacity washers, handling big, bulky items. Plus, the extra-large door opening makes loading and unloading easy.

MICROPROCESSOR CONTROLS

Programmable controls let you adjust pricing at the touch of a button. The microprocessor coin-drop helps prevent slugging and the optional audit system matches cycles used to coins collected for additional accountability.

FOR YOUR CUSTOMERS:

- Large 50-Pound Capacity
- One Touch Selects Drying Temperature
- Digital Display Shows Time Remaining In Cycle
- Extra-Large Door Opening

FOR YOUR OPERATION:

- Fits Through 36" Doorway
- Extra-Large Security Coin Vault
- Extra-Large Lint Compartment
- Easy-Access Design For Self-Service



LAUNDRY SOLUTIONS
YOU CAN *DEPEND* ON.

LARGE CAPACITY
LETS YOU SERVE MORE CUSTOMERS

visit maytagcommerciallaundry.com
or call 800-662-3587



OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.



MDG50PCCWW MAYTAG® COMMERCIAL MULTI-LOAD DRYER


Maytag® Commercial Multi-Load Dryer

MICROPROCESSOR COIN-DROP

| DRYER SPECIFICATIONS | |
|---|---------------------------------------|
| MODEL | MDG50PCCWW |
| TUMBLER | |
| Capacity — lbs. (kg) | 50 (22.7) |
| Capacity — cu. ft. (cu. m) | 18.3 (.518) |
| Diameter — in. (cm) | 32 ³ / ₄ (83.2) |
| Depth — in. (cm) | 37 ¹ / ₂ (95.3) |
| DRIVE MOTOR | |
| HP (kw) | 3/4 (.560) |
| AIRFLOW | |
| Cfm (cmm) | 750 (21.2) |
| HEAT INPUT | |
| BTU/hr. (kcal/hr.) | 150,000 (37,800) |
| GAS INLET | |
| In. (cm) | 1/2 (1.3) |
| VOLTAGE/BREAKER SIZE — amps | |
| 120V/1 PH | 20 |
| COLORS | |
| White | • |
| APPROXIMATE WEIGHT | |
| Crated — lbs. (kg) | 700 (317.7) |
| Uncrated — lbs. (kg) | 651 (295.3) |
| DIMENSIONS | |
| A) Height — in. (cm) | 72 (182.9) |
| B) Width — in. (cm) | 34 ¹ / ₄ (87) |
| C) Depth including door handle — in. (cm) | 49 ⁵ / ₈ (126) |
| D) Floor to center of exhaust — in. (cm) | 10 ¹ / ₂ (26.7) |
| E) Exhaust diameter — in. (cm) | 8 (20.3)* |
| Door opening — in. (cm) | 21 ¹ / ₂ (54.6) |

*Requires 8" (20.3 cm) material if venting horizontally; 10" (25.4 cm) if venting vertically.

See specific instructions for proper installation.
Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

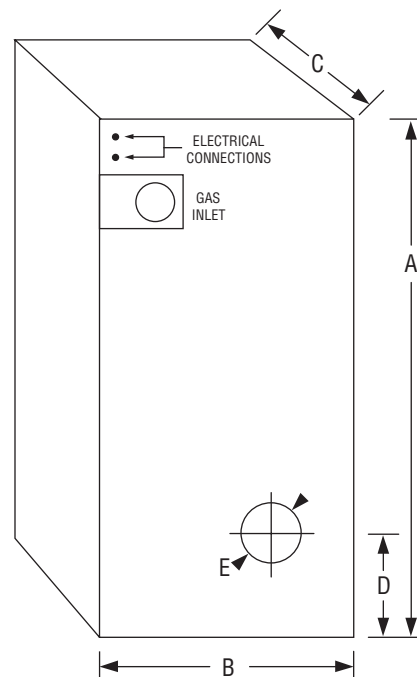

NEW YORK CITY
M.E.A.



THE BEST WARRANTY IN THE BUSINESS— 5 YEARS ON ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

For more information and pricing, contact:

Equipment Marketers

100 Melrose Avenue
Cherry Hill, NJ 08003

Phone: 800.223.1376

Fax: 856.428.5477

www.equipmentmarketers.net

maytag@equipmentmarketers.net